


组合多唇高压密封圈 W10



装配例

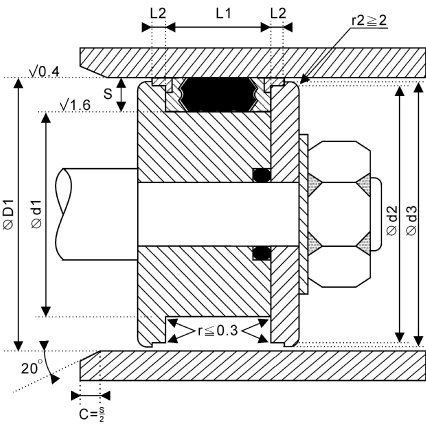

型式例

截面图	材料	温度范围	压力	速度	特点	代号
	NBR PA POM	-30至100	≤70	≤0.5	密封性好, 结构紧凑, 安装方便	W10

D1	倒角C	D1	倒角C	尺寸	公差	尺寸	公差
22~60	4	250以上	10	φ d1	h 9	φ d2	0, -0.5
60~120	5			φ D1	H9		
120~180	6.5			L 1	+0.25,0		
180~250	7.5			L 2	+0.1,0		

D1	d1	d2	L1	L2	D1	d1	d2	L1	L2	D1	d1	d2	L1	L2
45	29	38.8	32	6.35	105	85	97.6	35	9.52	165	135	158	45	12.7
50	34	43.77	32	6.35	110	85	101.82	45	12.7	170	140	163	45	12.7
55	40	48.77	32	6.35	110	90	102.7	35	9.52	177.8	152.4	169.55	44.45	12.7
60	44	53.8	32	6.35	114.3	88.9	106.12	44.45	12.7	180	155	171.6	45	12.7
63	47	56.74	32	6.35	115	90	106.82	45	12.7	185	160	176.72	45	12.7
63.5	47.62	57.25	31.75	6.35	120	95	111.82	45	12.7	190	165	181.72	45	12.7
65	49	58.7	32	6.35	120	100	112.8	35	9.52	200	175	191.72	45	12.7
70	50	62.62	35	9.52	125	100	116.82	45	12.7	210	185	201.6	45	12.7
75	55	67.7	35	9.52	127	101.6	118.8	44.45	12.7	220	195	211.6	45	12.7
80	60	72.62	35	9.52	130	105	121.82	45	12.7	230	205	221.72	45	12.7
80	64	72.62	32	9.52	130	110	122.7	35	9.52	240	215	231.72	45	12.7
85	65	77.62	35	9.52	135	110	126.82	45	12.7	250	225	241.72	45	12.7
90	70	82.58	35	9.52	139.7	114.3	131.47	44.45	12.7	260	235	251.72	45	12.7
90	74	82.87	32	9.52	140	115	131.72	45	12.7	270	245	261.72	45	12.7
92.07	73.02	84.66	34.92	9.52	140	120	132.7	35	9.52	280	255	271.72	45	12.7
95	75	87.6	35	9.52	145	120	136.72	45	12.7	290	265	281.72	45	12.7
95.25	76.2	87.86	34.92	9.52	150	125	141.72	45	12.7	300	275	291.72	45	12.7
100	80	92.6	35	9.52	152.4	127	144.15	44.45	12.7	360	335	351.76	44.5	12.7
101.6	82.55	94.2	34.92	9.52	160	135	151.72	45	12.7					