




装配例

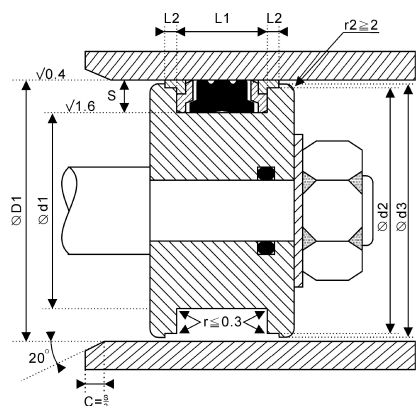

型式例

| 截面图 | 材料 | 温度范围 | 压力 | 速度 | 特点 | 代号 |
|-----|------------------|---------|-----|------|------------------|----|
| | NBR PA POM | -30至100 | ≤35 | ≤0.5 | 密封性好, 结构紧凑, 安装方便 | W9 |

| D1 | 倒角C | D1 | 倒角C | 尺寸 | 公差 | 尺寸 | 公差 |
|---------|-----|-------|-----|-----|--------|-----|-----|
| 22~60 | 4 | 250以上 | 10 | φd1 | h 9 | φd2 | h11 |
| 60~120 | 5 | | | φD1 | H9 | | |
| 120~180 | 6.5 | | | L 1 | +0.2,0 | | |
| 180~250 | 7.5 | | | L 2 | +0.1,0 | | |

| D1 | d1 | L1 | D1 | d1 | L1 | D1 | d1 | L1 | D1 | d1 | L1 |
|----------------|----------------|-------|----|----|----|----|----|----|----|----|----|
| 1.750+0.006/-0 | 1.569+0/-0.002 | 0.250 | | | | | | | | | |
| 2.000+0.007/-0 | 1.820+0/-0.002 | 0.250 | | | | | | | | | |
| 2.250+0.007/-0 | 2.069+0/-0.003 | 0.250 | | | | | | | | | |
| 2.375+0.007/-0 | 2.194+0/-0.003 | 0.250 | | | | | | | | | |
| 2.500+0.007/-0 | 2.318+0/-0.003 | 0.250 | | | | | | | | | |
| 2.750+0.007/-0 | 2.522+0/-0.003 | 0.250 | | | | | | | | | |
| 3.000+0.007/-0 | 2.771+0/-0.003 | 0.250 | | | | | | | | | |
| 3.250+0.009/-0 | 3.021+0/-0.003 | 0.250 | | | | | | | | | |
| 3.250+0.009/-0 | 3.021+0/-0.003 | 0.245 | | | | | | | | | |
| 3.500+0.009/-0 | 3.270+0/-0.003 | 0.250 | | | | | | | | | |
| 3.500+0.009/-0 | 3.272+0/-0.003 | 0.295 | | | | | | | | | |
| 3.750+0.009/-0 | 3.520+0/-0.003 | 0.250 | | | | | | | | | |
| 4.000+0.009/-0 | 3.770+0/-0.003 | 0.250 | | | | | | | | | |
| 4.000+0.009/-0 | 3.709+0/-0.003 | 0.425 | | | | | | | | | |
| 4.000+0.009/-0 | 3.772+0/-0.003 | 0.245 | | | | | | | | | |
| 4.500+0.009/-0 | 4.229+0/-0.003 | 0.250 | | | | | | | | | |
| 4.500+0.009/-0 | 4.229+0/-0.003 | 0.550 | | | | | | | | | |
| 5.000+0.010/-0 | 4.709+0/-0.004 | 0.400 | | | | | | | | | |
| 5.000+0.010/-0 | 4.772+0/-0.004 | 0.245 | | | | | | | | | |
| 6.000+0.010/-0 | 5.709+0/-0.004 | 0.375 | | | | | | | | | |
| 6.000+0.010/-0 | 5.675+0/-0.004 | 0.500 | | | | | | | | | |